

# **PRODUCTS FOR WALLS AND CEILINGS**





Spirit	2
Hamelekon	12
Leko	16
Casa Bella	22
Mefisto	24

# MY SECOND NATURE IS IMPECCABLE





**SPIRIT Acrylic Latex Impeccable White** 

Degree of gloss: MAT



High-quality white paint with a matt finish designated for interior painting of walls and ceilings.

#### **Properties:**

- Extremely high hiding power at low thickness of the dry coating
- Excellent whiteness and impeccable spreading properties
- Excellent resistance to wet abrasion and washing class 1 in accordance with ISO 11998

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
19-21 m²/L	30 min	24 hours	2	water

Packages: 1L; 2,5; 5L





Colour White



High-quality white paint with a satin finish, designated for interior painting of premises exposed to intense people movement and contamination. It allows frequent cleaning.



#### **Properties:**

- Excellent hiding power
- The coating is easy for maintenance and cleaning
- Excellent resistance to wet abrasion and washing class 1 in accordance with ISO 11998
- > Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15-17 m²/L	15 min	24 hours	2	water

Packages: 1L; 2,5L







Colour

White







High-quality waterborne base for tinting in light pastel colours for interior painting of walls and ceilings.

Up to  ${f 3}$  times higher resistance to abrasion<sup>3</sup>

## **Properties:**

- Excellent hiding power
- High resistance to wear up to 3 times higher resistance to abrasion and washing - class 2 in accordance with ISO 11998
- Covers small surface defects
- > Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15-18 m²/L	30 min	24 hours	2	water

Packages: 1L; 2,5L; 5L







## Colour /in accordance with colour chart/

Explore, Select, Imagine

## **SPIRIT Tint Base White Satin**

Degree of gloss **SATIN** 



Up to 7 times

higher resistance to abrasion<sup>3</sup>

High-quality waterborne base for tinting in light pastel colours for interior painting of walls and ceilings.



- Excellent hiding power
- Excellent resistance to wear and durable silk shine up to 7 times

resistance to abrasion and washing - class 1 in accordance with ISO 11998

- Easy for maintenance and cleaning
- Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15-18 m²/L	15 min	24 hours	2	water

Packages: 1L; 2,5L; 5L

WHITE SATIN







Colour /in accordance with colour chart/

Explore, Select, Imagine



# WE SET HIGH GOALS AND EXCEED THEM









High-quality waterborne base for tinting in medium saturated colours for interior painting of walls and ceilings.

## **Properties:**

- Excellent hiding power
- High resistance to wear up to 3 times higher resistance to abrasion and washing - class 1 in accordance with ISO 11998
- Covers small surface defects
- > Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
13-15 m²/L	30 min	24 hours	2	water

Packages: 1L; 2,5L; 4,8L







## Colour /in accordance with colour chart/

Explore, Select, Imagine

## **SPIRIT Tint Base Semitransparent Satin**

Degree of gloss **SATIN** 



High-quality waterborne base for tinging in medium saturated colours for interior painting of walls and ceilings. It is applied in premises exposed to frequent contamination.



- Excellent hiding power
- Excellent resistance to wear and durable silk shine up to 7 times higher resistance to abrasion and washing - class 1 in accordance with ISO 11998
- Easy for cleaning and maintenance
- Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
14-16 m²/L	15 min	24 hours	2	water

**Packages:** 1L; 2,5L; 4,8L

SEMITRANSPARENT SATIN







Colour /in accordance with colour chart/

Explore, Select, Imagine

# REMARKABLE FIRST IMPRESSION FOR EVENT.









High-quality waterborne base for tinting in saturated colours for interior painting of walls and ceilings.

## **Properties:**

- Excellent hiding power
- High resistance to wear up to 3 times higher resistance to abrasion and washing class 1 in accordance with ISO 11998
- Contains a special dispersion which guarantees durability of colours
- > Accompanying products: Spirit Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12-14 m²/L	30 min	24 hours	2	water

Packages: 1L; 2,5L; 4,5L






## Colour /in accordance with colour chart/

Explore, Select, Imagine

## **SPIRIT Tint Base Transparent Satin**

Degree of gloss **SATIN** 





## **Properties:**

- Excellent hiding power
- Contains a special dispersion which guarantees durability of colours
- Excellent resistance to wear and durable silk shine up to 7 times higher resistance to abrasion and washing - class 1 in accordance with ISO 11998
- Accompanying products: Spirit Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12-14 m²/L	15 min	24 hours	2	water



Packages: 1L; 2,5L; 4,5L



## Colour /in accordance with colour chart/

Explore, Select, Imagine





High-quality waterborne interior paint that is offered in 12 complimentary colours inspired by the most adventurous world places. One can capture the desired atmosphere at home by painting with Spirit Adventure colours.

## **Properties:**

- Excellent hiding power
- Easy cleaning
- Durability of colours
- > Accompanying products: Spirit Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12-15m²/L	30 min	24 hours	2	water
		Grand	Antolono	

Ashikaga Marrakesh Panjin Canyon Canyon Colour\* Maldives Patagonia Provence Tuscany Siberia











High-quality decorative water-based coating produced by Italian technology. The sand particles contained within give the walls a soft pearl effect and make the coating suitable for different interior styles.

## **Properties:**

- Extremely easy to apply in one coat
- Resistant to washing
- Easy for cleaning
- > Accompanying products: Leko Nano Primer, Spirit Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8 m²/L	2 hours	24 hours	1	it is not diluted

Packages: 1L; 2,5L







#### Colour\*

Two basic colours Gold and Silver, with an option to be tinted additionally in accordance with Spirit Modena catalogue





High-quality transparent lacquer for interior and exterior use. Suitable for premises exposed to intense people traffic for example public places. Gives a satin shine to surfaces.

## **Properties:**

- Gives a satin shine to coatings
- Displays high weather resistance
- Protects from contamination in depth. Easy to be cleaned

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15-20 m <sup>2</sup> /L	30 min	3-4 hours	2	water

Packages: 1L; 2,5L





#### Colour

Transparent

# **SPIRIT Primer**



High-quality primer designated for interior use. It is applied before painting with saturated colours.

#### **Properties:**

- Keeps the accuracy and uniformity of colours
- Decreases the paint consumption
- Fast drying
- > Accompanying products: Spirit Tint Base Transparent Matte/Satin

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
16-17 m²/L	15 min	2-3 hours	1	water

Packages: 1L; 2,5L





Colour

## **HAMELEKON Interior Base for tinting**





Designated for new interior painting and restoration of walls and ceilings. It is machine tinted in pastel and medium saturated colours.

## **Properties:**

- Very good hiding power
- Easy for application
- · Good resistance to wet friction and washing
- Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12-14 m²/L 30 min		24 hours	2-3	water

Packages: 1L; 2L; 4L; 10L; 15L







## Colour /in accordance with colour chart/

Explore, Select, Imagine

# **HAMELEKON Exterior Base for tinting**

Degree of gloss
MAT



Designated for protection and decoration of facades. It is machine tinted in pastel and medium saturated colours.

#### **Properties:**

- Very good hiding power
- Contains silicone for improved water resistance
- Good resistance to wet abrasion and washing class 1 in accordance with ISO 11998
- > Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12-14 m²/L	30 min	24 hours	2-3	water



Packages: 1L; 2L; 4L; 10L; 15L









Explore, Select, Imagine





Packages: 0,95L; 1,9L; 3,8L; 9,5L; 14,3L

ionages: 0,552, 1,52, 5,62, 5,52,







Designated for new interior and exterior painting and restoration of walls and facades. It is machine tinted in saturated colours for interior and exterior use.

## **Properties:**

- Very good hiding power
- Easy for application
- Good resistance to wet abrasion and washing class 1 in accordance with ISO 11998

## > Accompanying products:

Hamelekon Primer for acrylate paints for tinting

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
9-12 m²/L	30 min	24 hours	2-3	water

## Colour /in accordance with colour chart/

Explore, Select, Imagine

## **HAMELEKON Tinting Paint**



Packages: 200ml





Designated for shading of white water-based paints for interior application. A great variety of pastel colours are obtained as well as saturated colours when the paint is used as a separate coating.

## **Properties:**

- Practical and easy for use
- Long-lasting colour stability
- Excellent compatibility with white waterborne paints

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
4-5 m²/L	2 hours	4-5 hours	2	water	

## Colour\*

	green	blue	red	orange	oxide red	yellow		brown	violet	black	
--	-------	------	-----	--------	--------------	--------	--	-------	--------	-------	--

# **HAMELEKON Pigment Tinting Paste**



Packages: 250g

Designated for shading of white water-based paints for interior and exterior use. A great variety of pastel colours is obtained.

#### **Properties:**

- Practical and easy for use liquid content, easy for dosing
- Long-lasting colour stability
- The water-based paints shaded with Hamelekon Pigment Tinting Pastes are resistant to atmospheric impacts and washing

#### **Consumption:**


Depending on the chosen colour or nuance the quantity of the paste may reach up to 10% of the waterborne paint weight

## **Drying time:**

Depending on the type of the waterborne paint.

#### Colour\*

green blue red	oxide red	yellow	oxide yellow	black
----------------	--------------	--------	-----------------	-------

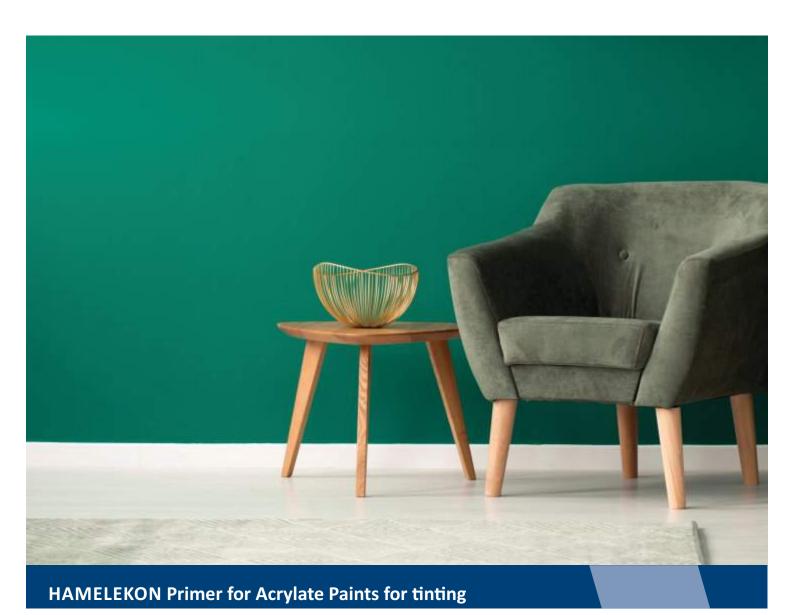



It is used for priming before application of paints that are machine tinted in saturated colours.

## **Properties:**

- Creates a coloured base
- Improves the hiding power of the coating
- Preserves the accuracy and uniformity of the colour

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15-16 m <sup>2</sup> /L	15 min	2-4 hours	1-2	water

Packages: 1L; 4L; 10L





Colour Beige





Waterborne interior paint for walls and ceilings with a strong bactericidal and fungicidal effect. It is suitable for use in household premises, healthcare and medical institutions, public-use buildings, buildings for production and trade with food.

## **Properties:**

- Displays long-term protection from mould and fungi
- The paint has a permit from the Bulgarian Ministry of Health for a biocide product
- Suitable for use in premises with intensive traffic and high humidity
- Very good resistance to wet abrasion and washing

## > Accompanying products:

Leko anti-mould spray with silver ions, Leko Nano Primer

Hiding power f	or Dry to tr	ne Complete drying	Number of coats	Thinner
14-16 m	²/L 30 mir	24 hours	2	water

Packages: 2,5L; 4L; 8,5L; 15L







#### Colour

White, with an option for machine tinting in light shades







Waterborne interior paint that is resistant to bacterial and fungal infections. Suitable for humid premises, bathrooms, storerooms, laundry rooms etc.

## **Properties:**

- The paint is resistant to bacterial and fungal infections
- Microporous coatings ensure "breathing" of the walls
- · Very good resistance to wet abrasion and washing
- > Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
14 m²/L	30 min	24 hours	2	water	

Packages: 1L; 2,5L; 4L







#### Colour

White, with an option for tinting in light tones with pigment pastes







Water-based paint for interior painting of walls and ceilings.

### **Properties:**

- Excellent whiteness and resistance against yellowing
- Microporous coating ensures "breathing" of the walls
- Excellent hiding power and fast drying
- > Accompanying products: Leko Nano Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12-14 m²/L	30 min	24 hours	2	water

Packages: 1L: 2,5L; 4L; 8,5L; 15L







#### Colour

White, with an option for tinting with pigment pastes in light shades

## **LEKO Interin in colour**

Degree of gloss MAT



Water-based paint for walls and ceilings. It is offered in 23 ready-mix colours.

## **Properties:**

- Beautiful and soft colours resistant to fading
- Ensures "breathing" of the walls
- Excellent adhesion to the substrate and resistance to wet abrasion and washing
- > Accompanying products: Leko Nano Primer

power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
14-16 m²/L	30 min	24 hours	2	water

Colour*	Brazilian nut	Almond	Creme Brulee	Peach	Desert sand	Cappuccino	Tropical breeze	Papaya	Golden rye	Chardonnay	Sunny morning
Chocolate mousse	Chili	Sugar candy	Coral reef	Magnolia	Snowy iris	Gentle magic	Fig	Polar light	Green apple	Bamboo	Silver fox

Packages: 2,5L







# **EFFECTIVE PROTECTION AGAINTS MOSQUITOES**

**LEKO Dry Mixture against mosquitoes** 

Degree of gloss

MAT



Powdery biocide intended for treatment of ceilings in household buildings, healthcare and medical institutions, premises for production and trade with food. The product protects the premises from flying insects (flies, mosquitoes).

## **Properties:**

- It is registered as a biocide product by the Bulgarian Ministry of Health
- Effective protection against mosquitoes
- > Accompanying products: Leko Nano Primer



Packages: 1,25kg; 2kg



Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8-11 m²/L	15 min	24 hours	2-3	water

Colour

White





Exterior acrylate paint with silicone for protection and decoration of facades, renovation and restoration of old buildings – cultural monuments, protection of surfaces where capillary condensation may occur.

## **Properties:**

- Excellent weather resistance
- Very good water-repellent properties
- High vapour permeability
- > Accompanying products: Leko Nano Primer

	Hiding lower for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
13	2-14 m²/L	15 min	24 hours	2	water	

## Packages: 1L: 2,5L; 4L; 8,5L; 15L







#### Colour

White, with an option for tinting in light shades

## **LEKO Nano Primer**



For impregnation of concrete and other interior and exterior construction materials. It is recommended especially for buildings where there is a risk of water penetration.

## **Properties:**

- Very good absorption in the base pores
- Creates barrier against water penetration
- Very good adhesion to substrate

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
10-20 m²/L	30 min	24 hours	1	water 1:4

## Packages: 1L



#### Coloui

Light blue (transparent after drying)







# **LEKO Anti-mould Spray with silver ions**



Packages: 500ml

Biocide with fungicidal action and the field of application is disinfection and cleaning of all types of solid surfaces (walls and ceilings, wood, stone) indoors and outdoors. The spray should take effect on infected surface for at least 30 minutes, afterwards the surface is scrubbed with an abrasive sponge or brush.

#### **Properties:**

- Does not contain chlorine and has no odour
- Effective not only on the surface but in depth on the infected base
- Does not change the colour of the treated surfaces
- > Accompanying products: Leko Interior Paint with silver ions

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8-20 m²/L	-	-	-	

#### Colour

White (colorless during spaying)





Water-based white paint designated for new interior painting or renovation of walls and ceilings.

## **Properties:**

- The product has good hiding power
- High whiteness
- Fast drying coating
- > Accompanying products

Casa Bella Wall Primer, Hamelekon Tinting Paint

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
10-12 m²/L	10-12 m <sup>2</sup> /L 15 min		2-3	water	

Packages: 4L; 8,5L; 15L







## Colour

White. It may be tinted in light shades with Hamelekon Tinting Paint

## **CASA BELLA Exterior Paint**

Degree of gloss MAT



Facade paint designated for new painting, renovation and restoration of old facade coatings.

#### **Properties:**

- Good resistance to mechanical impacts and atmospheric influences
- Good water-repellent ability of the coatings
- Excellent adhesion with surfaces

## > Accompanying products

Casa Bella Wall Primer, Hamelekon Pigment Tinting Pastes

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8-9 m²/L	30 min	24 hours	2-3	water











White. May be tinted with Hamelekon Pigment Tinting Pastes





Packages:1L



It is used for impregnation of lime-sand plasters, concrete, gas-concrete, gypsum, gypsum cardboards, before interior and exterior painting and before application of polymer plasters.

## **Properties:**

- Penetrates the pores of the base and reinforces it
- Impregnates the base and equalises its absorbing ability
- Decreases the consumption of paints

Casa Bella Wall Primer is a concentrate and is diluted in ratio 1 part primer : 4 parts water

Hiding power fo one coa	or Dry to the	e Complete drying	Number of coats	Thinner
10-20 m <sup>2</sup>	/L* 2 hours	2 hours	1	water

<sup>\*</sup> as ready for use product

#### Colour

White (transparent after drying)



Used for interior painting of walls and ceilings for which there are no requirements for resistance of coatings to washing.

## **Properties:**

- Microporous coating, ensures "breathing" of the walls
- Easy for application
- Fast drying coating
- > Accompanying products: Casa Bella Wall Primer

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
5-6m <sup>2</sup> /kg	15 min.	3-4 hours	2-3	water

Packages: 5kg; 8kg; 14.5kg; 25kg








#### Colour

White

# **MEFISTO Breathing Paint for walls and ceilings in colour**

Degree of gloss **MAT** 



Available in 10 pastel colours.

## **Properties:**

• Microporous coating, ensures "breathing" of the walls

requirements for resistance of coatings to washing.

- Easy for application
- Fast drying coating
- > Accompanying products: Casa Bella Wall Primer



Packages: 5kg








Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
5-6m <sup>2</sup> /kg	15 min.	3-4 hours	2-3	water

Used for interior painting of walls and ceilings for which there are no

Colour\*

moon- stone	banana	avocado	blue lagoon	vanilla	melon	peach	mango	rosedust	lilac
----------------	--------	---------	----------------	---------	-------	-------	-------	----------	-------

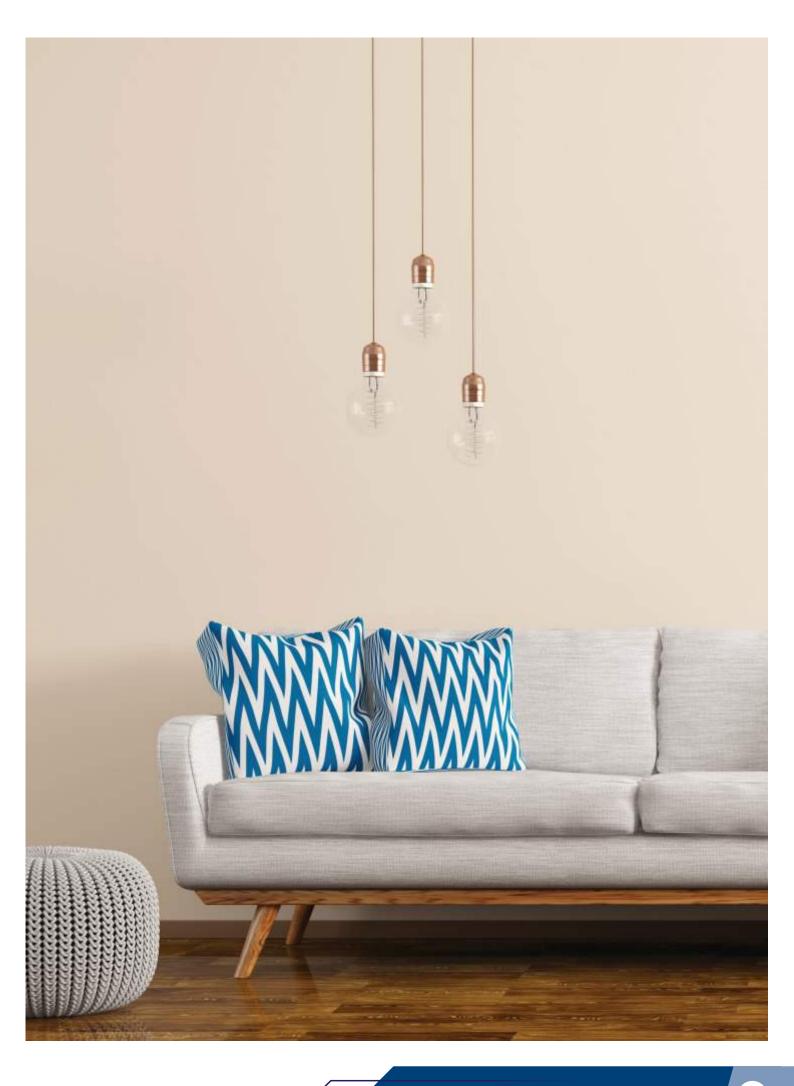

# PRODUCTS FOR WOOD AND METAL





Timmer	28
Protecta	34
Hamelekon	39
Leko	40
Casa Bella	52
Mefisto	54
Thinners	54

## **TIMMER Wood Impregnant**



Packages: 750ml



High-quality biocide preservative which penetrates deep into wood and its active substances protect the wood from insects and development of fungi/mould that lead to colouring (formation of blue stains), decay and destruction. It is used for treatment of all types of wooden surfaces as well as hardwood and softwood products indoors and outdoors.

## **Properties:**

- Deep penetrating
- Effective against wood destroying insects
- Effective against mould and fungi


Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
200 ml/m <sup>2</sup>	1 hour	4-6 hours	1-2	-

#### Colour

Transparent

## **TIMMER Wood Oil**

Degree of gloss SATIN



## **Properties:**

- The wood breathes
- Resistance to atmospheric impacts and UV-rays
- Emphasizes the natural structure of wood
- > Accompanying products:

**Timmer Wood Impregnant** 

Hiding power for one coat	Dry to the touch	Complete drying	Complete Number of coats	
11-15 m²/L	30 min	24 hours	1-2	-

Packages: 750ml

timmer







Colour

Transparent



# **TIMMER Antique – effect wood coating**

Degree of gloss MAT





High-quality waterborne effect coating which gives an artificially aged look to surfaces and products from hardwood and softwood in the interior and exterior.



- Gives an Antique style effect
- Easy for grinding
- Suitable for interior and exterior use



## Packages:750ml

😭 timmer








#### Colour

White. It may be tinted in 300 colours from Select catalogue

Thinner

water

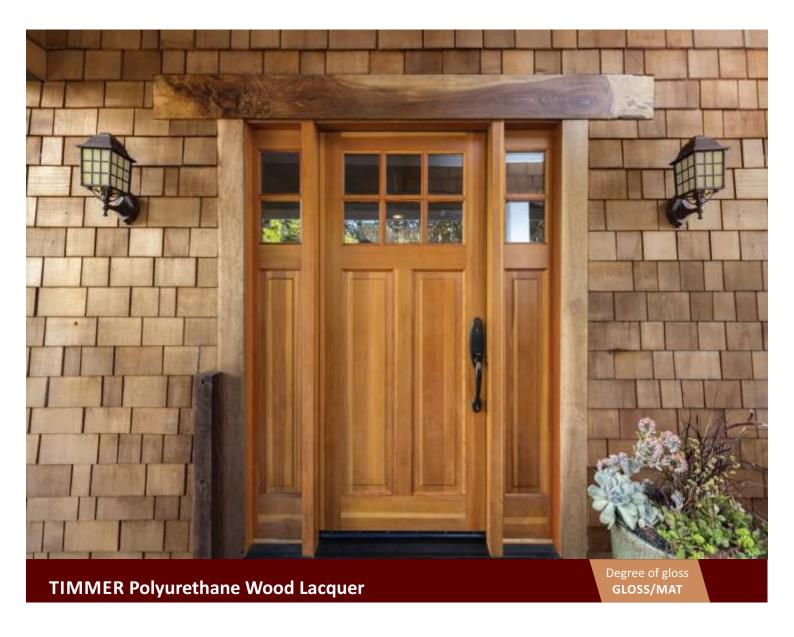



High-quality water-soluble thick-layered lacquer for wood, intended for protection and decoration of all kinds of wooden surfaces as well as hardwood and softwood products in the interior and exterior.

## **Properties:**

- Thick-layered coating
- Possibility for applying of just 1 coat
- High elasticity
- > Accompanying products:

Timmer Wood Impregnant

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
10-15 m <sup>2</sup> /	L 2 hours	24 hours	1-2	water	

Packages: 750ml





#### Colour

Transparent





High-quality waterborne wood lacquer intended for protection and decoration of all types of wooden surfaces as well as hardwood and softwood products used in the interior and exterior.

## **Properties:**

- High UV protection
- High weather resistance
- High elasticity
- > Accompanying products: **Timmer Wood Impregnant**

Hiding power for one coat	Dry to the touch	Complete Number of coats		Thinner
10-15 m²/L	1 hour	24 hours	2-3	water

Packages: 750ml







## Colour

Transparent



wooden surfaces as well as hardwood and softwood products. The product penetrates in depth and emphasizes the wood texture.

High-quality water-soluble wood stain used for colouring of all types of

## **Properties:**

- Emphasizes the wood texture
- Durability of colours
- The coating does not flake and peel
- > Accompanying products:

**Timmer Wood Impregnant** 

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
10-13 m <sup>2</sup> /L	15-20 min	1-2 hours	1-2	water

Packages: 750ml













## **TIMMER Wood Filler**

High-quality acrylate wood filler designated to level and smooth out unevenness by filling pores and other defects on wood surfaces before subsequent treatment (priming, varnishing, painting, etc.).

Complete drying

1 hour

Number of coats

1-2

## **Properties:**

- Good filling properties
- Fast drying
- Easy for grinding
- > Accompanying products:

Timmer Wood Impregnant

Dry to the touch

20 min




Packages: 350g

white pine

Thinner

it is not diluted

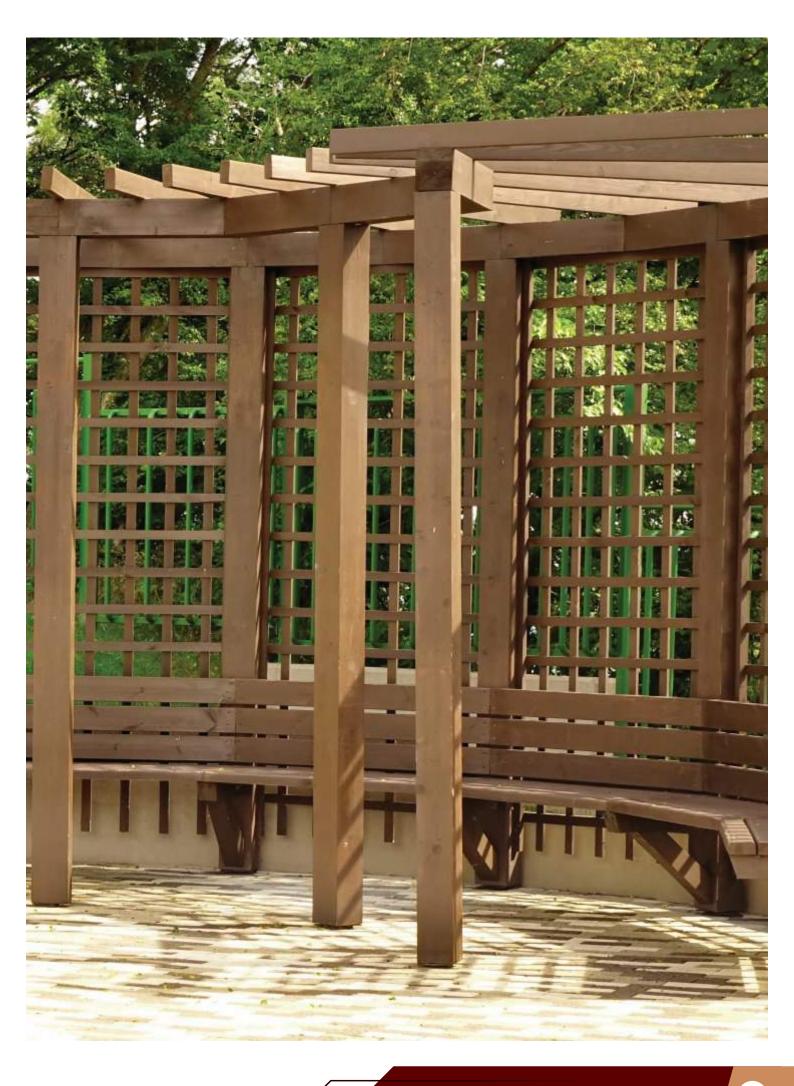



Packages: 500ml; 2,5L







3in1 - rust transformer, primer and decorative coating. High-quality enamel for anticorrosion protection and decoration of ferrous metal surfaces (railings, fences, metal roofs, tanks, etc.)

#### **Properties:**

- The enamel is applied directly on the rust surface and it pacifies the rust and eliminates the remaining moisture
- It is used as a primer and also provides a long-lasting gloss coating that is resistant to humidity and atmospheric impacts
- Up to 15 years anticorrosion resistance of the coating in accordance with ISO 12944
- > Accompanying products: PROTECTA Thinner

power for one coat		o the ich	drying		Number of coats		Thinner	
15 m²/L	6 ho	ours	24 hours		2-3		Protecta Thinner	
Colour*	black	white	light beige	cherry red	dark green	light grey	dark brown	silver
effect coatings			grey metallic	black metallic	green metalic	gold metallic	old aold	old copper

# PROTECTA 3in1 tinting base White/Transparent (PAS/TRA)

Degree of gloss
GLOSS



3in1 - rust transformer, primer and decorative coating. Protecta 3in1 tinting base is a high-quality glossy coating for protection and decoration of ferrous metal surfaces (railings, fences, metal roofs, tanks, etc.). The base can be tinted in hundreds of colours.

## **Properties:**

- The base can be tinted in a variety of RAL colours
- The enamel is applied directly on the rust surface and it pacifies the rust and eliminates the remaining moisture
- It is used as a primer and also provides a long-lasting gloss coating that is resistant to humidity, corrosion and atmospheric impacts
- Accompanying products: PROTECTA Thinner

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
3-10 m <sup>2</sup> /L	4 hours	24 hours	2-3	Protecta Thinner

Packages: 1L








#### Colour\*

Can be tinted in 180 colours according to RAL catalogue

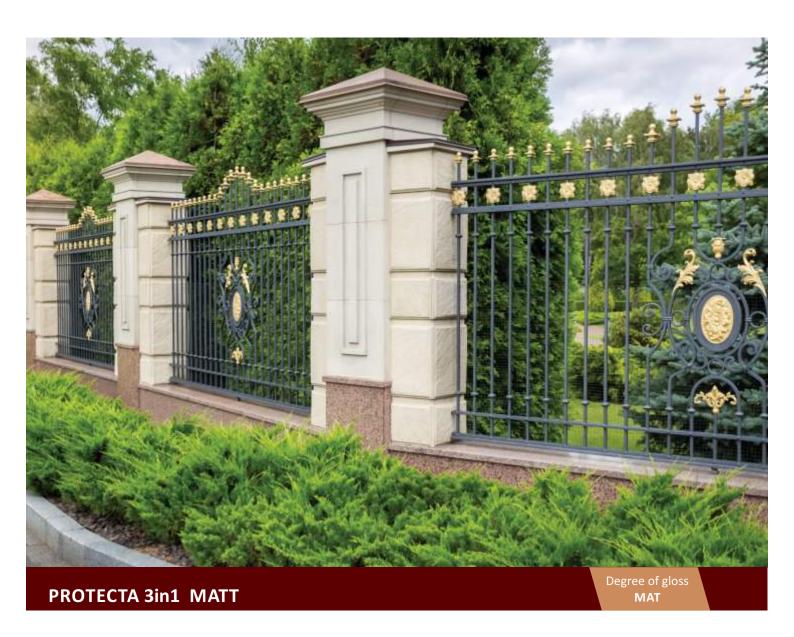



Packages: 500ml







3in1 - rust transformer, primer and decorative coating. Protecta 3in1 MATT is a high-quality matt coating for protection and decoration of ferrous metal surfaces (railings, fences, metal roofs, tanks, etc.).

### **Properties:**

- The enamel is applied directly on the rust surface and it pacifies the rust and eliminates the remaining moisture
- It is used as a primer and also provides a long-lasting coating that is resistant to humidity, corrosion and atmospheric impacts
- The matt coating has a decorative function and also covers the substrate defects
- > Accompanying products: PROTECTA Thinner

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15 m²/L	30 min	24 hours	2-3	Protecta Thinner

### Colour\*





Packages: 500ml







Corrosion inhibitor, primer and decorative coating.

Protecta All Metals is a high-quality enamel intended for protection and decoration of new and rusty surfaces from ferrous metals (railings, fences) and for non-ferrous metals - railings, fences, PVC pipes, etc.

### **Properties:**

- Decorative coating for all types of metal surfaces non-ferrous and ferrous ones.
- Full atmospheric resistance
- Application directly on the surface
- > Accompanying products: PROTECTA Thinner

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
15 m²/L	40 min	24 hours	2-3	Protecta Thinner

### Colour\*

copper graphite platinium bronze	ze
----------------------------------	----

# **PROTECTA Heat-resistant Spray**

Degree of gloss **MAT** 



Packages: 400ml

High-quality, heat-resistant product which provides long-lasting protection and decoration of metal surfaces that are exposed to high temperatures up to 800°C. It is used indoors and outdoors.

### **Properties:**


- Endures heating up to 800°C
- Fast drying
- Resistant to atmospheric impacts

Hiding power for package	Dry to the touch	Complete drying	Number of coats	Thinner
1,25 – 1,75 m²	30 - 60 min	3 - 4 hours	2-3	-

### Colour\*







### **Properties:**

- Excellent electrochemical bond with metal surfaces
- Contains 95% zinc with purity of 99,9%
- Prevents the occurrence of rust through galvanizing (cold galvanization)
- > Accompanying products: PROTECTA Thinner





Packages: 800g; 3kg







Colour\*

grey

# **PROTECTA Corrostop**



Packages: 450ml

Protecta Corrostop is used for removal of rust from all ferrous metal surfaces: doors, fences, railings, metal roofs, etc.

### **Properties:**

- It penetrates deeply into the corroded surface and transforms the rust
- Displays long-lasting protection against subsequent appearance of corrosion
- Decreases the time for treatment of surfaces

Complete drying: 2 hours

# **PROTECTA Degreaser**



Packages: 450ml

It is used for cleaning and degreasing of metal or plastic parts and surfaces from greasy stains, oils and other synthetic contaminants before further processing.

### **Properties:**

- It dissolves and cleans various types of oils and pollutants
- Easy to apply
- Fast and direct effect on surfaces

### **PROTECTA Thinner**



Packages: 250ml

Intended for dilution of Protecta enamels. It is used also for cleaning of instruments (brushes, rollers, spraying guns and etc.) after painting.





Packages: 700ml







High-quality, water-soluble base for tinting intended for interior and exterior painting of wooden surfaces (walls of wooden houses, railings, eaves, joinery) as well as primed metal surfaces.

### **Properties:**

- Very high atmospheric resistance long-lasting durability of colours
- Elasticity of the coating at big temperature changes
- The coating is resistant to moisture and atmospheric impacts

# > Accompanying products:

for wooden surfaces - Leko Impregnating Primer for wood for metal surfaces - Leko AQUA Primer for metal

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12 - 13 m²/L	30 min	24 hours	2-3	water

### Colour

Tinted in 170 colours from RAL catalogue



High-quality gloss water-based paint intended for interior and exterior painting of wood (walls of wooden houses, railings, beehives), primed metal surfaces, concrete, gypsum cardboard, stone surfaces.

### **Properties:**

- Excellent atmospheric resistance
- Good adhesion with old alkyd coatings
- Excellent resistance of coatings against sticking under hot pressure

### > Accompanying products:

Wooden surfaces – Leko Impregnating Primer for Wood Metal surfaces – Leko Anticorrosion Primer PF-07 or Leko AQUA Primer for metal

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12 - 13 m²/L	30 min	24 hours	2	water

Packages: 700ml





### Colour\*

black	white	red	brown	yellow	blue	green
-------	-------	-----	-------	--------	------	-------





High-quality satin water-based paint intended for interior and exterior painting of wood (walls of wooden houses, railings, beehives), primed metal surfaces, concrete, gypsum cardboard, stone surfaces.

### **Properties:**

- Excellent atmospheric resistance
- · Good adhesion with old alkyd coatings
- Excellent resistance of coatings against sticking under hot pressure

### > Accompanying products:

Wooden surfaces – Leko Impregnating Primer for wood Metal surfaces - Leko Anticorrosion Primer PF-07 or Leko AQUA Primer for metal

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12 - 13 m²/L	30 min	24 hours	2	water

Packages: 700ml





### Colour\*

black	white	red	brown	yellow	blue	green
-------	-------	-----	-------	--------	------	-------

# **LEKO Alkyd Super White paint**

Degree of gloss **GLOSS** 



It is used for painting of wooden joinery, doors, railings, fences, etc., for decorative protection of wooden surfaces, for new painting and renovation.

### **Properties:**

- High-quality gloss coating
- High whiteness and elasticity
- Good application behaviour

### > Accompanying products:

Leko Impregnating Primer for wood

	<b>∧</b> ∰(O	Ohim
	АЛКИДНА БОЯ СУПЕР БЯЛА	
M		
耳		
Amen	а белата О	0

12 m <sup>2</sup> /L 3 - 4 hours 24 hours 2		
TE III / E S 4 HOUIS E4 HOUIS	Orgachim Thinner	

Packages: 650ml







Colour white



Packages: 650ml; 2,5L







Fast Drying enamel intended for painting of ferrous metal surfaces in systems for anticorrosion protection.

### **Properties:**

- High gloss and fast drying
- Complete atmospheric resistance
- Extremely durable colours
- Accompanying products: Leko Anticorrosion Primer PF-07 Leko Alkyd Primer PF-02

Hiding power for one coat  12 - 13 m²/L  60 min				Number of coats		Thinner  AMV Thinner; Orgachim Thinner	
		RAL 8002	RAL 1014	RAL 3020	RAL 5012	RAL 6016	RAL 1003

# **LEKO Protective Stone Lacquer**

Degree of gloss

GLOSS



- Weather resistant
- Deeply penetrating
- Emphasizes the natural colour of stone

decorative tiles, indoors and outdoors.



Packages: 750ml; 2,5L







Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
10 m²/L	30 min	2 hours	2	no dilution

Finish coating for protection of surfaces decorated with stone or

### Colour



Enamel used for painting of ferrous metal surfaces in systems for anticorrosion protection.

### **Properties:**

- High gloss
- Complete atmospheric resistance and high hardness
- Excellent hiding power

### > Accompanying products:

Leko Anticorrosion Primer PF-07

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
13 m²/L	60 min	16 hours	2	AMV Thinner

Packages: 750ml







### Colour\*

Ural	Everest	Mont blanc	Savannah	Gobi	Grand Prix	Vesuvius	Cypress	Light blue	Olympus	
------	---------	---------------	----------	------	---------------	----------	---------	---------------	---------	--

# **LEKO Enamel Silver Ferrolite**

Degree of gloss **GLOSS** 



Used for anticorrosion and decorative protection of metal surfaces that are exposed to atmospheric influences (tanks, reservoirs, etc.)

- **Properties:**
- Provides long-lasting anticorrosion protection of surfaces
- Resistance of coating to big temperature changes
- The coating is resistant to all atmospheric impacts UV sunlight, wind, rain, snow and ice
- > Accompanying products:
  - for ferrous metals: Leko Anticorrosion Primer PF-07
  - for non-ferrous metals /cold galvanized/ Leko Universal Primer for metal surfaces

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
6 - 8 m²/L	6 hours	24 hours	2	AMV Thinner

Packages: 650ml; 2.5L

емайллак

СРЕБЪРЕН ФЕРОЛИТ

Opraxum







### Colour

Silver



Packages: 700ml; 2,5L







High-quality water-based lacquer intended for new varnishing and renovation. It is used for impregnation (when diluted with water at ratio 1:1) and as a finish coating. It is intended for exterior and interior painting of wood.

### **Properties:**

- The lacquered surfaces have high elasticity and weather resistance
- Durability of colours
- Excellent cohesion with the substrate


Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8 - 11 m²/L	30 min	24 hours	2	water

Colour*	colourless	Canadian fir	oliva	pine	pinia	oak	African teak
		teak	walnut	chestnut	mahogany	rosewood	green

# **LEKO AQUA Parquet Lacquer**

Degree of gloss

GLOSS



### **Properties:**

- It is applied easily, spreads well
- The coatings are glossy
- High hardness and good wear resistance

/	B	(O	Gran.
ЛА	КЗАГ	IAPKET	11/2
вакразреди Ниссеустой-		<b>(</b>	0

Packages: 700ml; 2,5L







Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8 - 10 m²/L	-	24 hours	2	It is not diluted

### Colour



Packages: 650ml; 2,5L







Decorative azure lacquer used for varnishing of wooden surfaces in the interior and exterior. It is suitable for application on wooden structures, fences, wooden lining, etc.

### **Properties:**

- The coatings emphasize the natural wood structure
- Provide long-lasting protection against atmospheric moisture and UV-rays.
- Excellent penetrating properties
- > Accompanying products: Leko Impregnating Primer for wood

power for one coat	Dry to the touch	drying	Number of coats	Thinner	
8 - 13 m²/L	-	24 hours	2	AMV Thinner	
Colour*	colurless	wenge che	ry morello oak	birch spruce	
	pine	fir walı	nut chestnut mahogany	rosewood ebony	

# **LEKO Yacht Lacquer**

Degree of gloss

GLOSS



• High atmospheric resistance

paneling, parquet, shelves, furniture, etc.

• Endurance to water and alkali – acting substances

• High resistance to abrasion

> Accompanying products: Leko Impregnating Primer for wood



Packages: 650ml; 2,5L







Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
7 - 11 m²/L	-	after 8 hours	2	AMV Thinner

Used for interior and exterior varnishing of wooden surfaces: yachts,

### Colour



Packages: 650ml + hardener 85ml



Designated for varnishing of wooden floors, parquet and wooden products which are not exposed to atmospheric impacts.

### **Properties:**

- High resistance to abrasion
- Extreme hardness and high gloss
- Endurance to water and detergents
- > Compulsory mixing with Hardener for 2K Parquet Lacquer 85 ml

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
12 - 15 m²/L	-	4 hours	2	It is not diluted

It is used for varnishing of wooden floors, parquet, solid wood products

• Exceptional strength and hardness of coating. It is resistant to

> Compulsory mixing with Hardener for 2K Polyurethane Parquet

### Colour

Transparent

**Properties:** • High gloss

and other wooden surfaces.

• Easy to be cleaned

Lacquer 325 ml

scratching, impacts and abrasion

Dry to the touch

# **LEKO 2K Polyurethane Parquet Lacquer**

Degree of gloss **GLOSS** 

Number of coats

Thinner

It is not diluted



Packages: 650ml + hardener 325ml

Colour

10 - 12 m²/L	-	8 hours	2



Packages: 750ml





Natural product, used for protection of wooden surfaces from moisture and water indoors and outdoors.

### **Properties:**

- Excellent penetrating ability
- Emphasizes the texture of the wood and prevents its darkening
- High resistance to moisture and atmospheric impacts

Hiding power for one coat	power for bouch dryin		Number of coats	Thinner	
8 - 10 m²/L	-	- 24 hours 2		It is not diluted	

### Colour

Yellow

# Wood Oil - fast drying



Packages: 900ml; 3L



Alkyd based product, used for protection of wooden surfaces indoors and outdoors.

### Properties:

- Excellent penetrating ability
- Emphasizes the texture of the wood and prevents its darkening
- High resistance to moisture and atmospheric impacts

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
11 - 14 m²/L	-	up to 15 hours	2	It is not diluted	

### Colour

Light yellow to yellow-green

# **LEKO Alkyd Primer PF-02**



Packages: 900g; 5kg







Used for priming of well-cleaned and degreased ferrous metal surfaces. Adhesive and filling primer for new wood surfaces before application of alkyd paints and enamels.

### **Properties:**

- Good filling and protective properties
- Suitability for grinding

### **Dilution:**

- for spraying with a gun up to 10 %
- for application with a brush, roller 5 %

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
6 - 8 m²/kg	5 hours	15 hours	1	AMV Thinner	

### Colour\*

# **LEKO Universal Primer for metal surfaces**

Used for anticorrosion protection of new and old surfaces of cold galvanized steel, as well as new and old ferrous metal surfaces.

### **Properties:**

- Excellent anticorrosion protection
- Easy for application
- Fast drying



Packages: 900g







Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
5 - 7 m <sup>2</sup> /kg	2 hours	8 hours	1	<b>UR Thinner</b>	

Colour\*

Light grey

# **LEKO Anticorrosion Fast drying alkyd Primer PF-07**



Used for priming of well-cleaned and degreased in advance ferrous metal surfaces that are exposed to severe atmospheric conditions.

### **Properties:**

- Excellent anticorrosion protection
- Fast drying

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
5 - 7 m <sup>2</sup> /kg	15 - 20 min	5 - 6 hours	1	AMV Thinner	

Packages: 900g











### Colour\*

light grey	black	oxide red
---------------	-------	--------------

# **LEKO AQUA Primer for metal**

Used for protection of new and repair of old surfaces from ferrous metals in a system with water-soluble paints for wood and metal.

### **Properties:**

- Fast drying, weak odour
- Good anticorrosion characteristics of coatings
- Excellent cohesion with surfaces

N ACO
ГРУНД ЗА МЕТАЛ
DANDEDALDIM ( ) ( )

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
10 - 13 m²/L	30 min	3 hours	2	water

Packages: 700ml







Colour Beige

# **LEKO Impregnating Primer for wood**



It is used for impregnation of wooden surfaces before application of decorative alkyd lacquers and paints for wood.

### **Properties:**

- Excellent penetrating ability
- High resistance to moisture and atmospheric changes
- Good application behaviour

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
10 - 11 m²/l	-	- 8 hours 1		it is not diluted	

Packages: 750ml; 3L







### Colour

Transparent

## **LEKO Removal**

Water-based product for removing of old alkyd, latex, alkyd-urethane, acrylate-urethane, nitrocellulose and other coatings.

Properties:

Complete drying

Number of coats

Thinner

it is not diluted

- Universal action
- High effectiveness
- Easy to work with does not leak and does not splash during application

Dry to the touch



Packages: 450g



Transparent gel





Packages: 200g; 1kg; 18kg





Used for gluing of wooden articles and assemblies in the furniture industry, veneer, cardboard, etc.

### **Properties:**

- Forms a solid film
- After drying remains transparent
- Bonds firmly

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner	
-	2 hours	4 hours	-	water	

### Colour

White to light grey (after its complete drying the glue becomes transparent)

# **LEKO GLUE C-200**



Packages: 200g; 500g; 1kg; 4kg; 18kg

Dry to the touch Complete drying Number of coats Thinner

3 hours

Used for gluing of paper, various cardboard materials, fabrics, floor and

wall linings on textile base, in construction, in households, etc.

**Properties:** • Bonds firmly

• After drying remains transparent • Forms elastic film, tensile resistant

30 min

White to light grey (after its complete drying the glue becomes transparent)



water



Packages: 650ml; 2.5L







High-quality gloss enamel for protection and decoration of wooden and metal surfaces.

### **Properties:**

- Variety of saturated and extremely durable glossy colours
- Forms coating, resistant to moisture and atmospheric impacts
- Easy application and good hiding power


### > Accompanying products

- for wooden surfaces Leko Impregnating Primer for wood
- for metal surfaces Casa Bella Alkyd Primer for ferrous metals

Hiding power for one coat	Dry to the touch		Com <sub>l</sub> dry		Number of coats		Thinner	
12 - 13 m²/L	2 - 4 hours		22 hours		2		Orgachim Thinner	
Colour*	RAL 9005	RAL 9016	RAL 7046	RAL 1015	RAL 1018	RAL 2010	RAL 8012	RAL 3020
		RAL 6026	RAL 6018	RAL 6029	RAL 5015	RAL 8001	RAL 8016	RAL 3002

# **CASA BELLA Enamel Satin**

Degree of gloss **SATIN** 



### **Properties:**

- Variety of saturated and extremely durable satin colours
- Forms coating, resistant to moisture and atmospheric impacts
- Easy application and good hiding power

### > Accompanying products

- for wooden surfaces Leko Impregnating Primer for wood
- for metal surfaces Casa Bella Alkyd Primer for ferrous metals

power for one coat	Dry to the touch		Complete drying		Number of coats		Thinner	
12 m²/L	2 - 4 hours		24 hours		2		Orgachim Thinner	
Colour*	black	white	light grey	dark grey	beige	milky cocoa	milky brown	coffee
		dark hrown	cherry red/	red	dark vellow	reseda	dark green	blue



Packages: 650ml; 2.5L









Packages: 650ml





Casa Bella AQUA Gloss is water-soluble enamel for exterior and interior protection and decoration of wooden (new or already painted walls of wooden houses, railings, eaves, beehives, joinery) as well as for primed metal surfaces.

### **Properties:**

- Water-soluble product without organic solvents
- High weather resistance long-lasting colour, gloss and elasticity at big temperature differences
- Good spreading properties

### Accompanying properties

- for wooden surfaces Leko Impregnating Primer for wood
- for metal surfaces Leko Aqua Metal Primer

Hiding power for one coat	power for touch		Number of coats	Thinner	
10 - 12m²/L	30 min	24 hours	2 - 3	water	

### Colour\*

black	white	red	green	blue	yellow
-------	-------	-----	-------	------	--------

# **Casa Bella Alkyd Primer for ferrous metals**

Casa Bella Alkyd Primer is adhesive and filler primer for priming of new and reparation of old steel surfaces.

### **Properties:**

- Good adhesion to steel surfaces and to old alkyd surfaces at reparation
- Easy for application
- Decreases paint consumption



Packages: 900g





Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
150-180 g/m <sup>2</sup>	8 hours	15 hours	1	AMV Thinner

### Colour\*

light	oxide
grey	red



Alkyd Paint, designated for decorative protection of metal and wooden surfaces, indoors and outdoors at normal atmospheric conditions.

### **Properties:**

- Satin coating
- Easy to apply
- Variety of beautiful colours

### > Accompanying products:

- for wooden surfaces Leko Impregnating Primer for wood
- for metal surfaces Casa Bella Alkyd Primer for ferrous metals

Hiding power for one coat	Dry to the touch	Complete drying	Number of coats	Thinner
8 - 10 m²/L	2 - 4 hours	24 hours	2	AMV Thinner

Packages: 650ml









RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL
9005	9010	7046	6032	5015	1015	1018	3020	8012	8016
9000	7010	/ 040	0032	0010	1010	1010	JUZU	0012	0010



## **ORGACHIM THINNER**



Packages: 450ml; 900ml

Dilution up to working viscosity of lacquer and paint materials on a base of alkyd resins.

### Colour

Transparent to light yellow

# **KORESELIN**



Packages: 1L

It is used for dilution up to working viscosity of nitrocellulose primers, nitrocellulose enamels, nitrocellulose transparent lacquers and other products, produced with nitrocellulose. For degreasing and cleaning of surfaces prior painting, for cleaning of tools.

### Colour

Transparent to light yellow

## **AMV THINNER**



Packages: 1L

Dilution up to working viscosity of lacquer and paint materials on a base of alkyd resins.

### Colour

Transparent to light yellow

## **UR THINNER**



Packages: 1L

Dilution up to working viscosity of alkyd-urethane primers, lacquers, lacquer and paint materials on an alkyd base.

### Colour

Transparent to light yellow



# Have a look at www.orgachim.bg

